

# MYERS® SPS-6

The Myers® SPS-6 pump is the ideal solution for a wide range of water drainage and circulation applications. Shallow flooded areas can be dewatered quickly and efficiently with this powerful and economical utility pump.

## APPLICATIONS

Light-duty applications such as flooded basements, flat roofs and swimming pool covers

## SPECIFICATIONS

**Capacities** – 20 GPM (75.7 LPM)

**Shut-off Head** – 22' (6.7 m)

**Solids Handling** – 1/8" (3.18 mm)

**Liquids Handling** – Drain water

**Intermittent Liquid Temperature** –  
Up to 140°F (60°C)

**Motor/Electrical Data** – 1/6 HP PSC,  
115V, 2A, 1Ø, 60Hz

**Acceptable pH Range** – 6-9

**Discharge, Garden Hose Adapter** –  
3/4" threaded (19.05 mm)

**Switch Off/On** – Manual

**Housing** – Flame-retardant polypropylene

**Power Cord** – 10', SJTW, SJTW-A

**Mechanical Seal** – Type 11A, carbon  
and ceramic



## FEATURES

### Ponds and Pools

Fast draining for repairs and maintenance on garden ponds and kid's pools

### Easy to Use

Simply place in water, attach standard garden hose for discharge and plug into a 115V outlet

### Thorough Dewatering

Remove standing water down to 1/8" depth

### Built Tough

Watertight, high-impact thermoplastic housing provides superior protection to motor and pump components

### Superior Motor

Efficient P.S.C. motor (no oil required) is designed with built-in thermal overload protection and draws only 2 amps

### Ten Times Better

Full carbon and ceramic shaft seal lasts ten times longer than traditional lip seals

### Goes Anywhere


Weighs only 9 lbs. and features a built-in carrying handle

## ORDERING INFORMATION


Catalog Number	HP	Volts	Phase/Cycles	Amps	Discharge Size	Switch Type	Cord Length	Approx. Wt. Lbs.
SPS-6	1/6	115	1/60	2	1-1/2"	Manual	10'	9

# MYERS® SPS-6

## DIMENSIONS

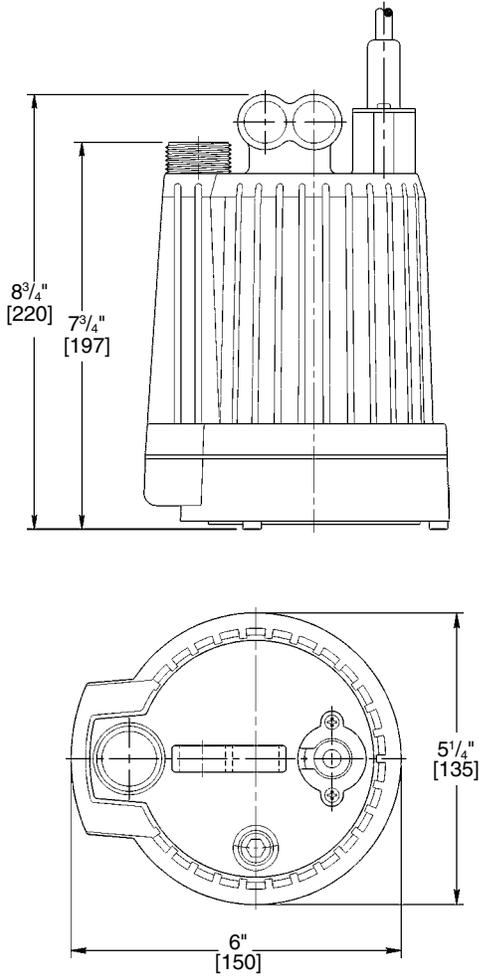

## PUMP PERFORMANCE

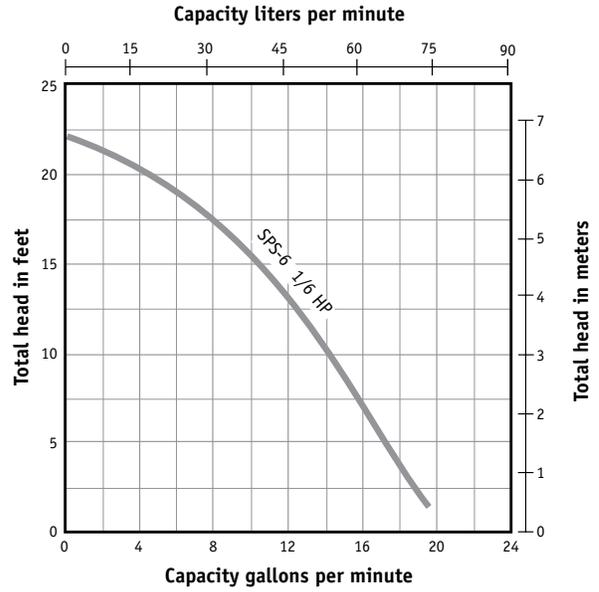

USA  
 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMEYERS.COM  
 PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA  
 269 TRILLIUM DRIVE, KITCHENER, ONTARIO, CANADA N2G 4W5  
 PH: 519-606-5484 ORDERS FAX: 800-426-9446

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.